


4 WAYS POWER COMBINER – WR90 – X BAND

Main Features

This WR 90 combiner offers high power and low insertion loss.

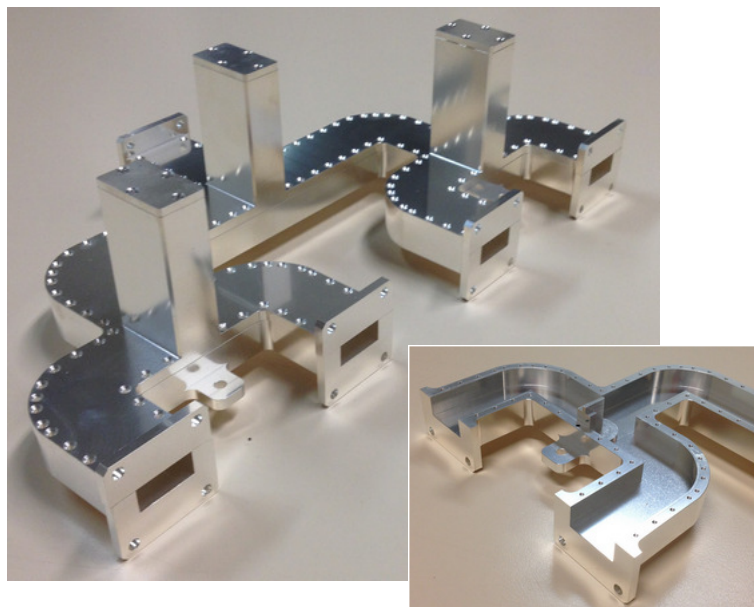

Specifications

Features	Values
Frequency range :	9100 to 9600 MHz
Insertion loss :	< 0.8 dB
Amplitude balance :	<0,3 dB
Phase balance :	< 4°
Isolation:	> 18 dB
Input VSWR:	1.3 :1
Output VSWR :	1.5:1
Input Power:	150 W peak per channel
Output Power:	500 W peak (20% D.C)
Waveguide :	WR90
Dimensions - (L x W x H)	333 x 178 x 93 mm
Operating temperature	-40°C – +70°C

**This product illustrates one of our proprietary skills.
 Contact us for any other application.**