
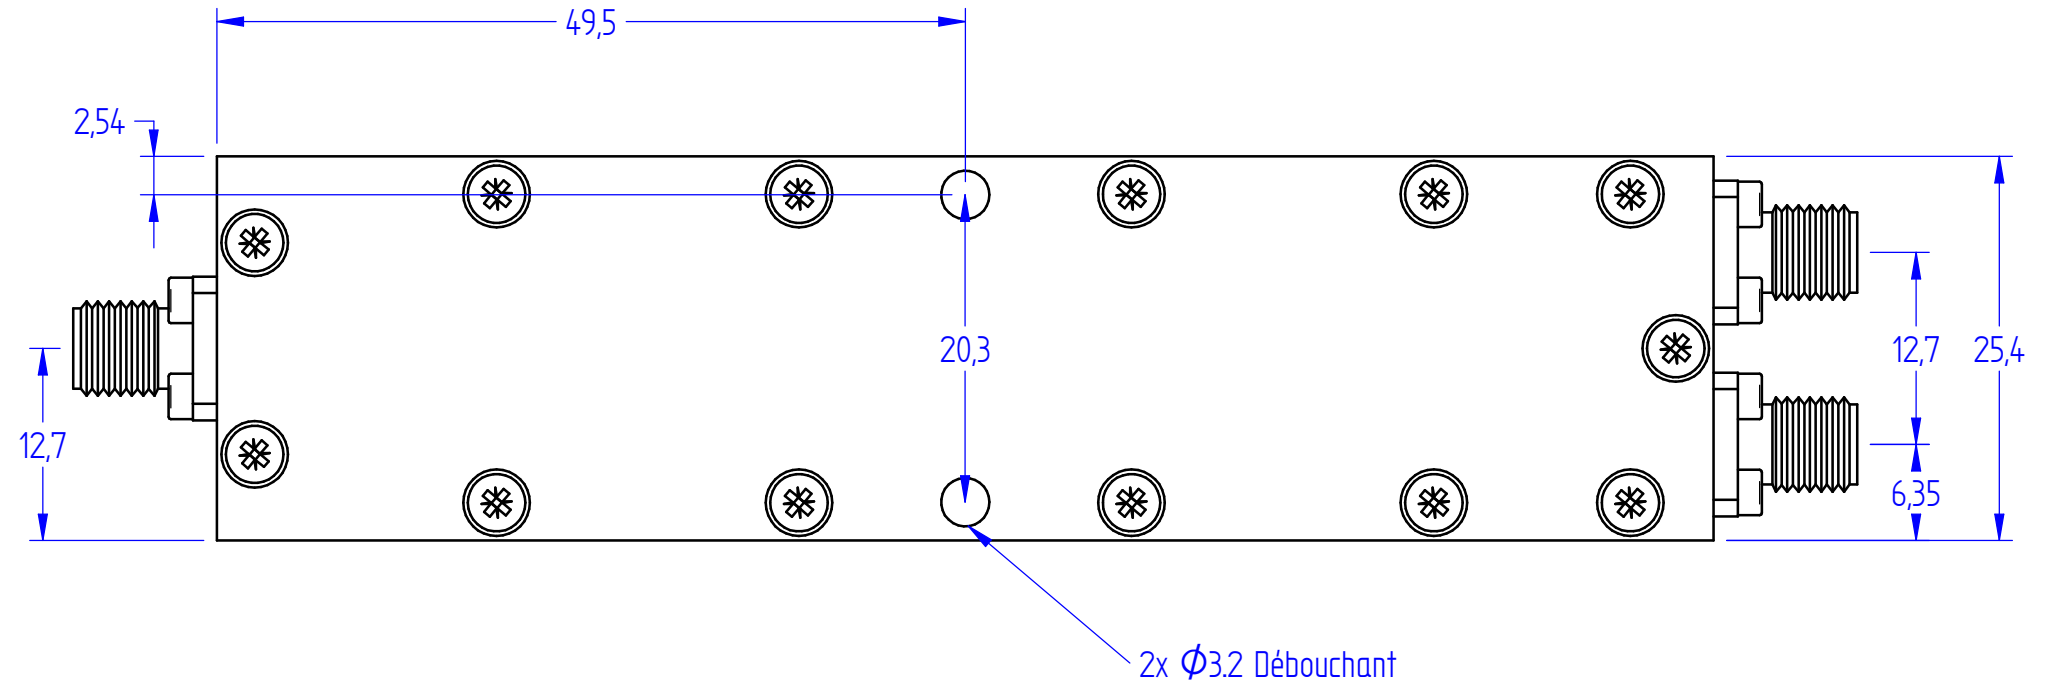
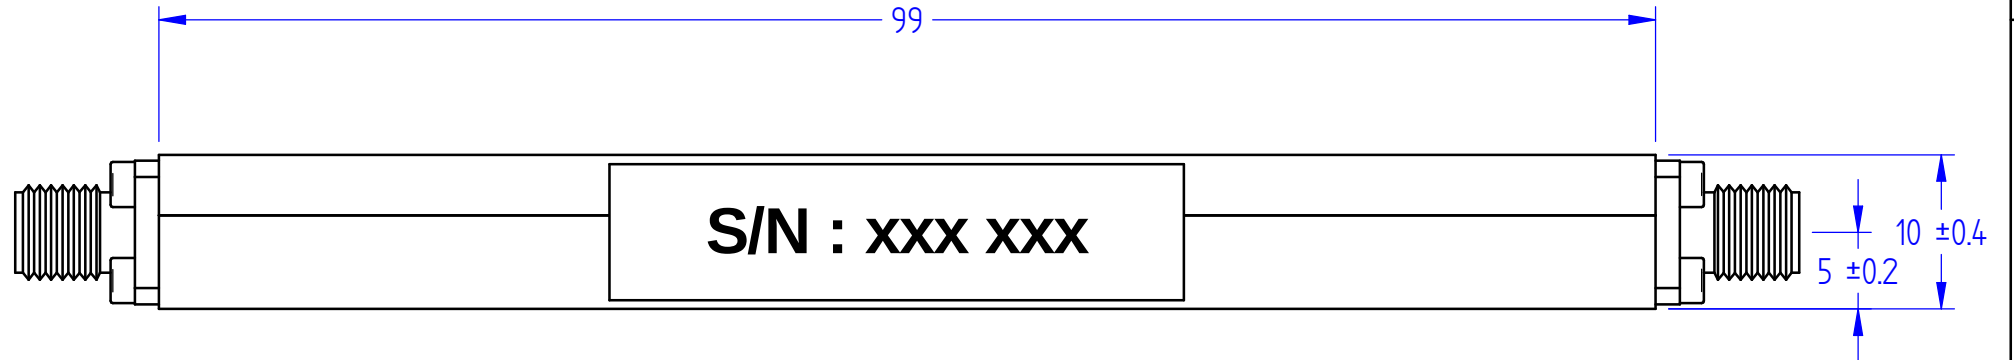


This document is subject to change without notice
This document is the exclusive property of DETI SAS and cannot be communicated to third parties or reproduced without prior written permission

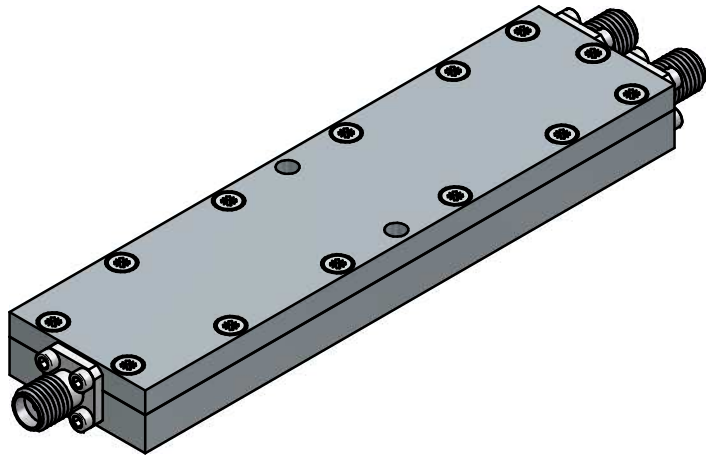

TECHNICAL SPECIFICATIONS

Frequency Range :	1000 - 18000 MHz
Insertion Loss :	1.5dB max.
Amplitude Balance :	0.5 dB max.
Phase Balance :	8° max.
Input VSWR :	1.6:1 max.
Output VSWR :	1.6:1 max.
Isolation :	17 dB min.
Max. Input Power :	30 W max @1.2:1 VSWR load
Operating Temperature :	-20°C to +80°C
Input Connector :	SMA Female
Output Connectors :	SMA Female

Last rev. additional information :								Material : Aluminum		Titre : Diviseur de puissance 2 voies 1-18 GHz 2-Way Power Divider 1-18 GHz DI-2-1000-18000-30-SF-SF Document Number : 001633 1501C		Déti MICROWAVE www.deti-sa.com
							Treatment : Surtec 650					
							Finish : Black paint					
C	Ajout de l'emplacement étiquette	W.Kherraz	22/09/2020	A. Le Gouellec	22/09/2020	S. Mellaza	22/09/2020	Gen. Tol. : ISO 2768 - mK				
B	Modification de la tolérance épaisseur (+/-0.1mm à +/-0.4mm)	W.Kherraz	15/04/2020	S. Mellaza	15/04/2020	S. Mellaza	15/04/2020	Orientation : 		Comment : DI-2-1000-18000-30-SF-SF		
A	Création du document sous ancien modèle	S.Mellaza	03/07/2014					Size : A3	Classif. : 2			
Rev.	Change	Drawn	Date	Check	Date	Approb.	Date	Scale : 2:1	Sheet : 1 / 1	Drawn : wkherraz	Date : 22/09/2020	