

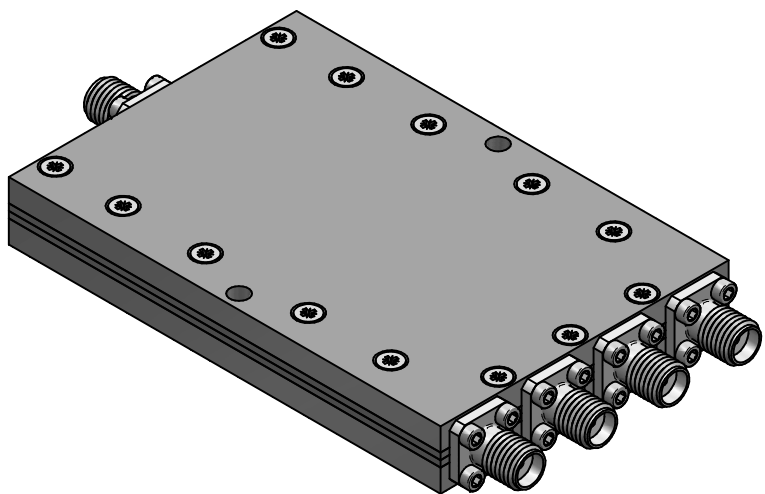


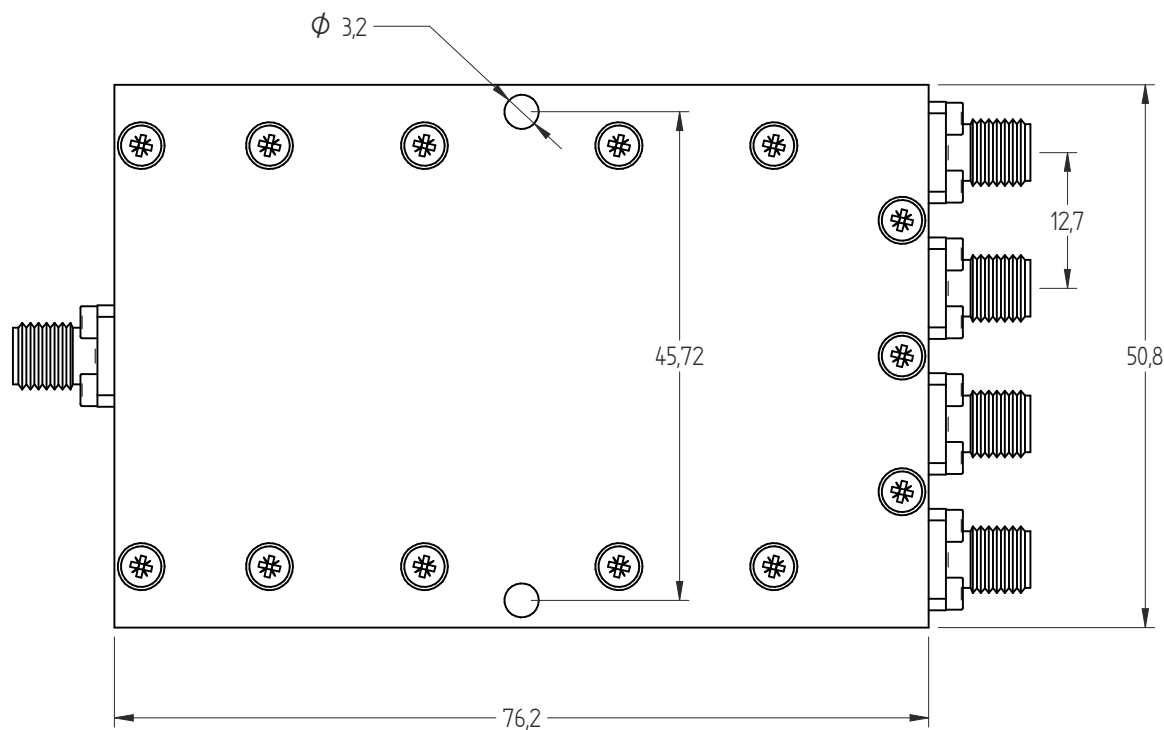

TECHNICAL SPECIFICATIONS

Frequency Range :	3200 - 6200 MHz
Insertion Loss :	0.9 dB max.
Amplitude Balance :	0.4 dB max.
Phase Balance :	6° max.
Input VSWR :	1.5:1 max.
Output VSWR :	1.5:1 max.
Isolation :	20 dB min.
Max. Input Power :	30 W average @ 1.2:1 VSWR Load
Operating Temperature :	-40°C to +85°C
Input Connector :	SMA Female
Output Connector :	SMA Female

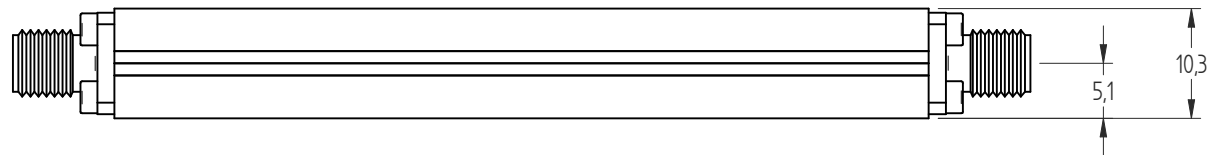

					Matière : Aluminum	Titre : 4 Way Power Divider DI-4-3200-6200-30-SF-SF			
					Traitement : Painted over Surtec 650				
					Classif. : 2	Tolérance générale : ISO 2768 - mK			
							Document N° : DI-4-3200-6200-30-SF-SF		
Date	Indice	Nature de la modification			Niv. Sup.	Echelle : 2:1	Feuille : 1 / 1	Date : 11/06/2018	Dessiné par : smellaza