

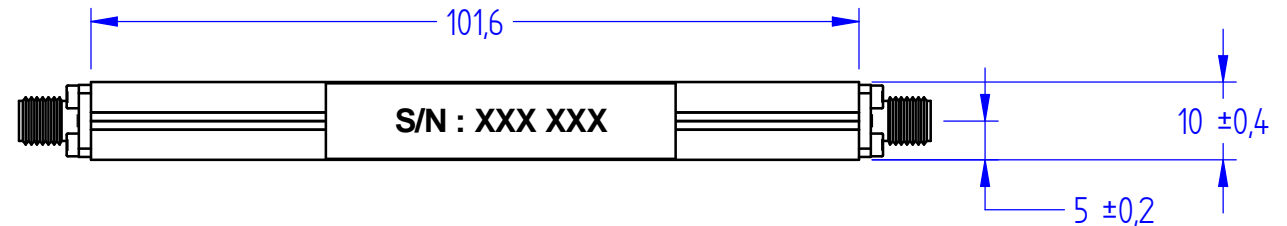


This document is subject to change without notice
This document is the exclusive property of DÉTI SAS and cannot be communicated to third parties or reproduced without prior written permission

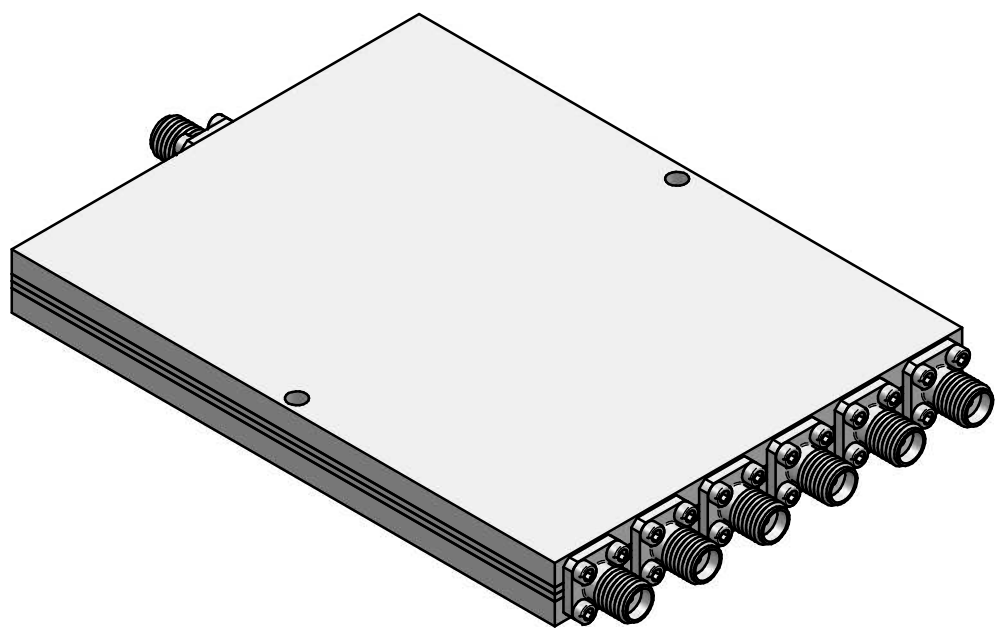

TECHNICAL SPECIFICATIONS

Frequency Range :	2000 - 8000 MHz
Insertion Loss :	1.2 dB max.
Amplitude Balance :	0.8 dB max.
Phase Balance :	7° max.
Input VSWR :	1.6:1 max.
Output VSWR :	1.6:1 max.
Isolation :	18 dB min.
Power Handling :	30 W average @ 1.2:1 VSWR Load
Operating Temperature :	-40°C to +85°C
Storage Temperature :	-55°C to +125°C
Mechanical Shocks :	MIL STD 202 - Method 213 Test cond. C: 100g 6ms ½
Sinus Vibrations :	MIL STD 202 - Method 204D Test cond. A : 10g / 10-2000HZ
Thermal Shocks :	MIL STD 202 - Method 107G Test cond. A: -40°C/+85°C
Humidity :	MIL STD 202 - Method 103 Test cond. B : 95% 96h

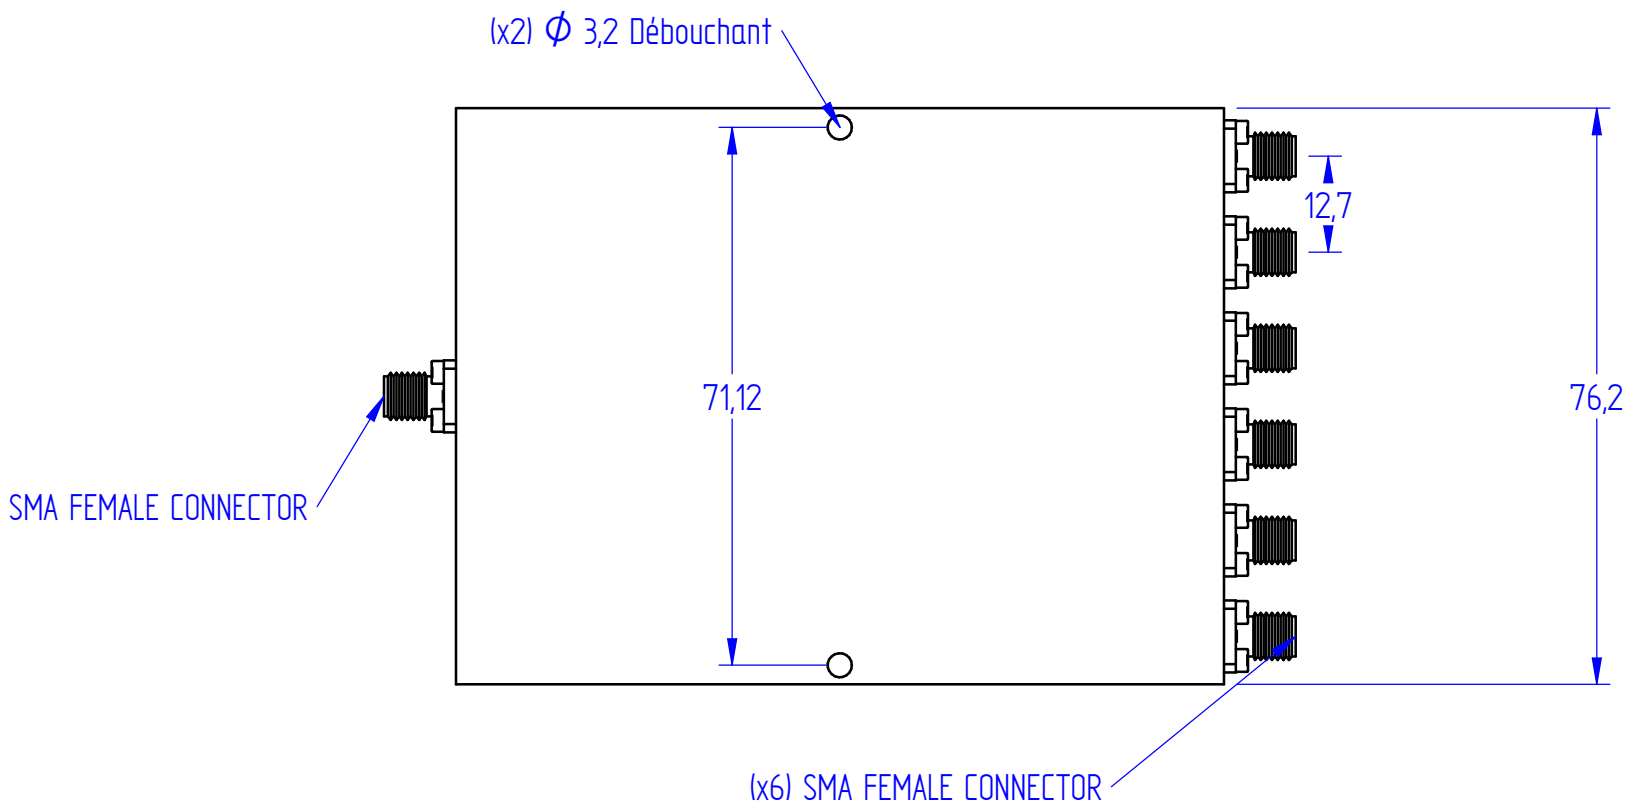

Last rev. additional information :							Material : Aluminium	Titre : Diviseur de Puissance 6 Voies	
							Treatment : Surtec 650	Titre : 6-Way Power Divider	
							Finish : Blue Paint (Pantone 280C DT6)	Comment : DI-6-2000-8000-30-SF-SF	
							Gen. Tol. : ISO 2768 - mK	Document Number : DI-6-2000-8000-30-SF-SF	
							Orientation :	Drawn : aleguellec	
							Size : A3	Classif. : 2	Date : 15/06/2020
							Scale : 1:1	Sheet : 1 / 1	
Rev.	Change	Drawn	Date	Check	Date	Approb.	Date		
A	Modification du cartouche	A. Le Gouellec	15/06/2020	S. Mellaza	15/06/2020	S. Mellaza	15/06/2020		
-	Création du document	E. Michaut	03/10/2013						

