
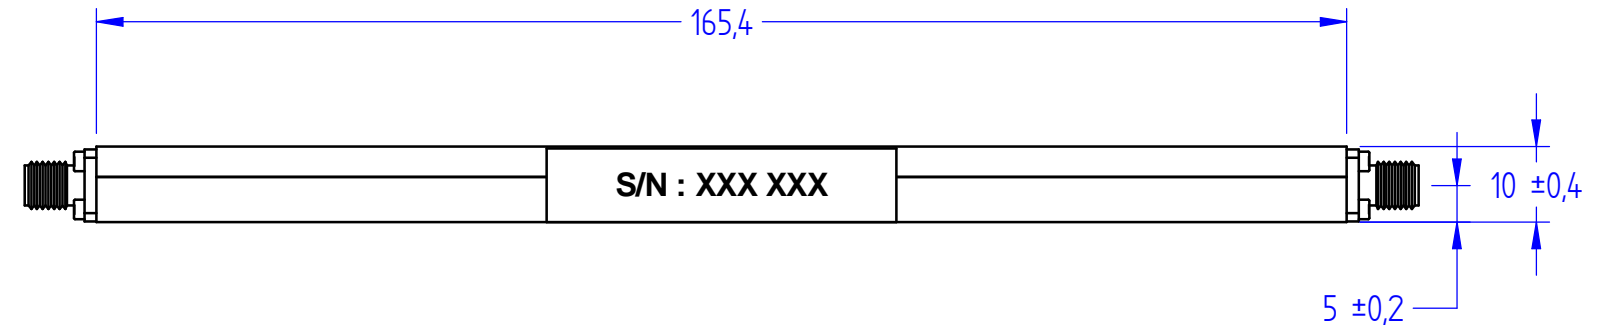



This document is subject to change without notice. This document is the exclusive property of DÉTI SAS and cannot be communicated to third parties or reproduced without prior written permission.

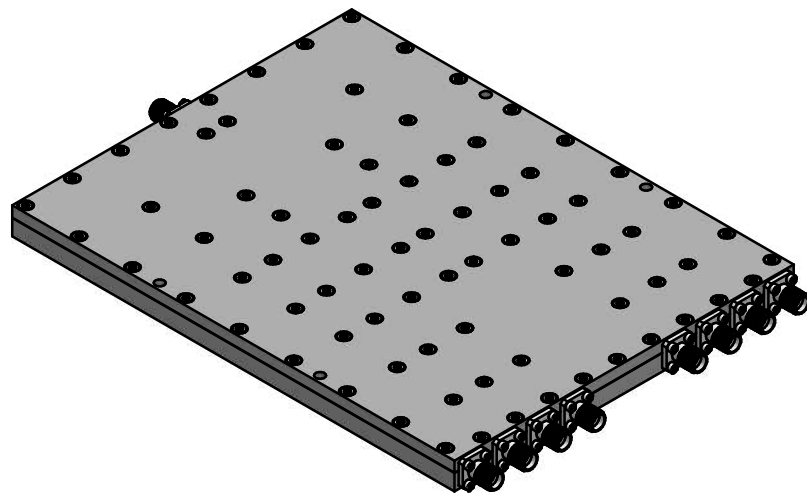

### TECHNICAL SPECIFICATIONS

- Frequency Range :** 800 - 3000 MHz
- Insertion Loss :** 1.3 dB max.
- Amplitude Balance :** 0.5 dB max.
- Phase Balance :** 6° max.
- Input VSWR :** 1.6:1 max.
- Output VSWR :** 1.6:1 max.
- Isolation :** 20 dB min.
- Power Handling :** 30 W average @ 1.2:1 VSWR Load
- Operating Temperature :** -40°C to +85°C
- Storage Temperature :** -55°C to +125°C
- Mechanical Shocks :** MIL STD 202 - Method 213  
Test cond. C: 100g 6ms ½
- Sinus Vibrations :** MIL STD 202 - Method 204D  
Test cond. A : 10g / 10-2000HZ
- Thermal Shocks :** MIL STD 202 - Method 107G  
Test cond. A: -40°C/+85°C
- Humidity :** MIL STD 202 - Method 103  
Test cond. B : 95% 96h

SMA FEMALE CONNECTOR

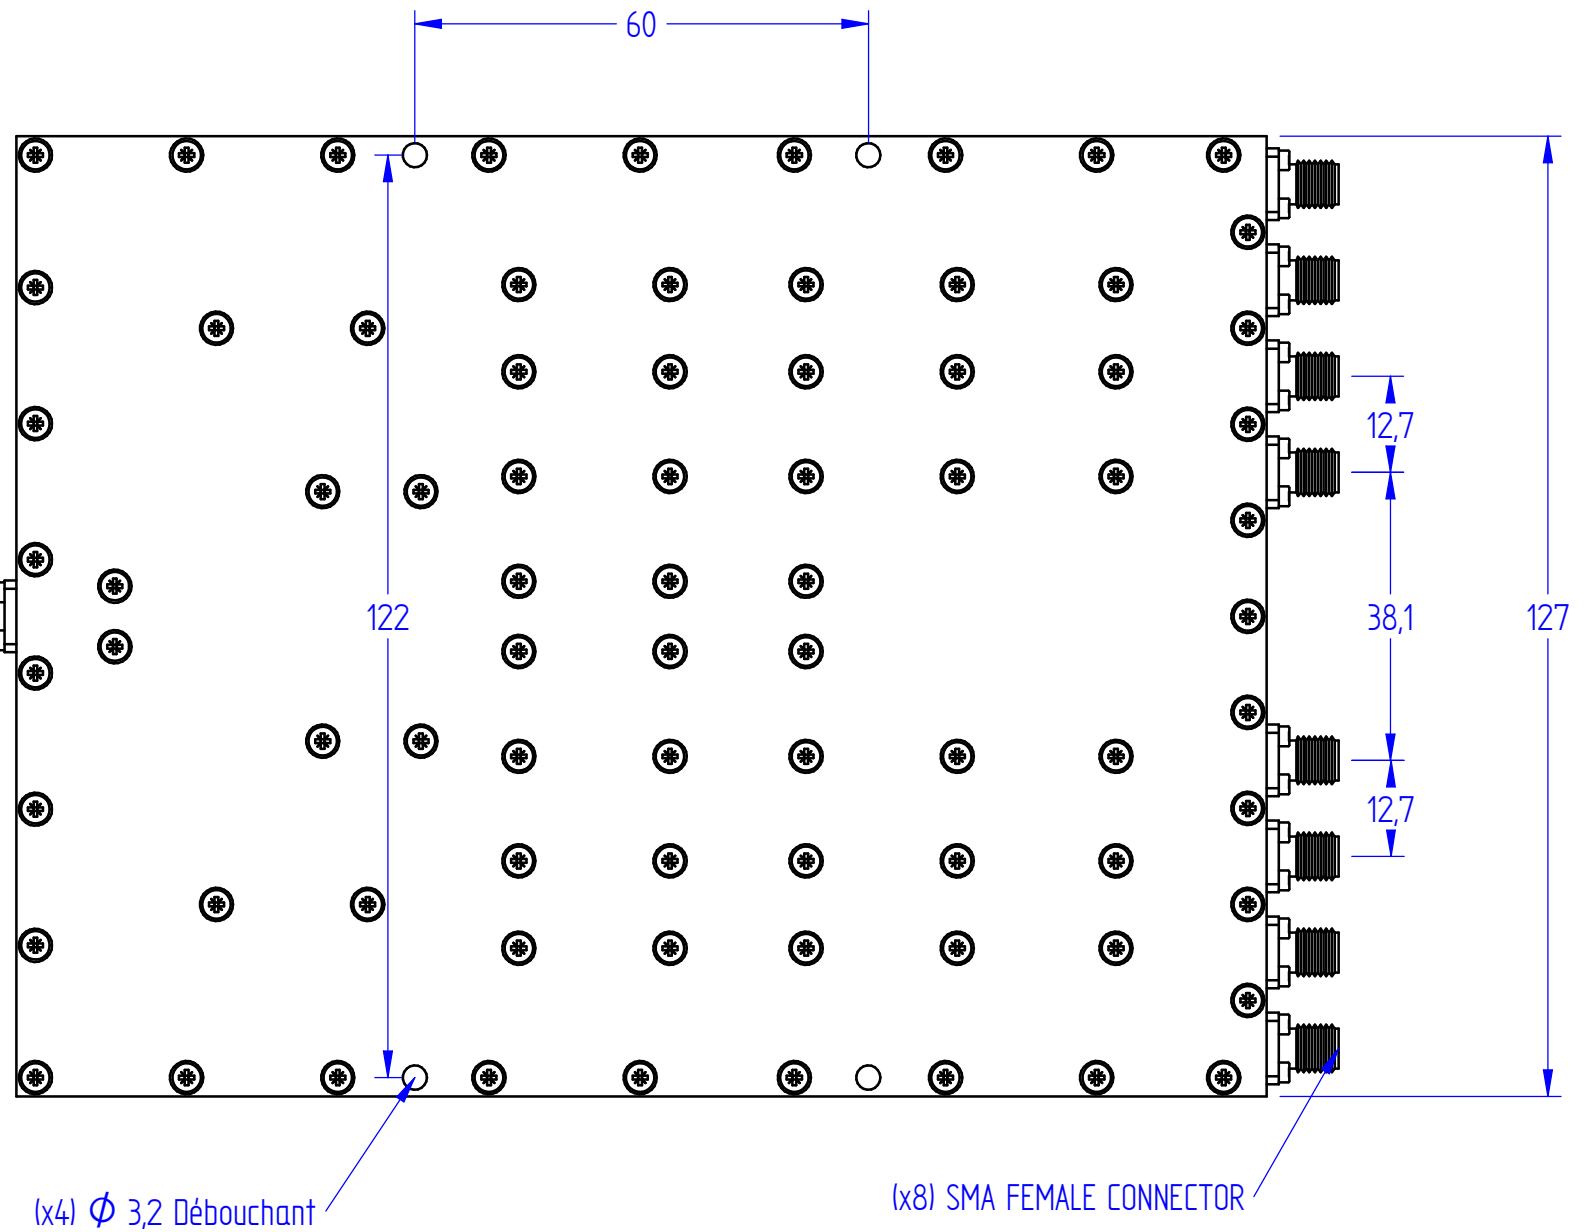

Last rev. additional information :							Material : Aluminium		Titre : Diviseur de Puissance 8 Voies	
							Treatment : Surtec 650		Titre : 8-Way Power Divider	
							Finish : Blue Paint (Pantone 280C DT6)		Comment : DI-8-800-3000-30-SF-SF	
							Gen. Tol. : ISO 2768 - mK		Document Number : DI-8-800-3000-30-SF-SF	
							Orientation :		Drawn : aleguellec	
							Size : A3		Date : 15/06/2020	
							Classif. : 2		Sheet : 1 / 1	
							Scale : 1:1		Date : 15/06/2020	
							Sheet : 1 / 1			

