
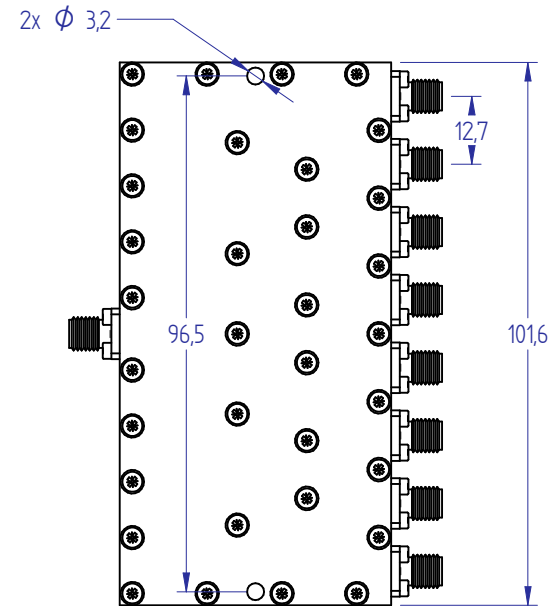
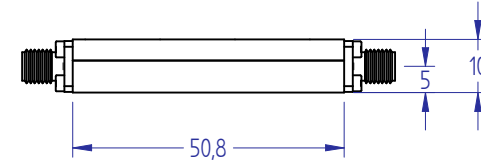


SPECIFICATIONS

Frequency Range :	6000 - 18000 MHz
Insertion Loss :	1.5 dB max.
Amplitude Balance :	0.5 dB max.
Phase Balance :	6° max.
Input VSWR :	1.6:1 max.
Output VSWR :	1.6:1 max.
Isolation :	16 dB min.
Max. Input Power :	30 W average @1.2:1 VSWR Load
Operating Temperature :	-40 to +85°C
Input Connector :	SMA Female
Output connectors :	SMA Female

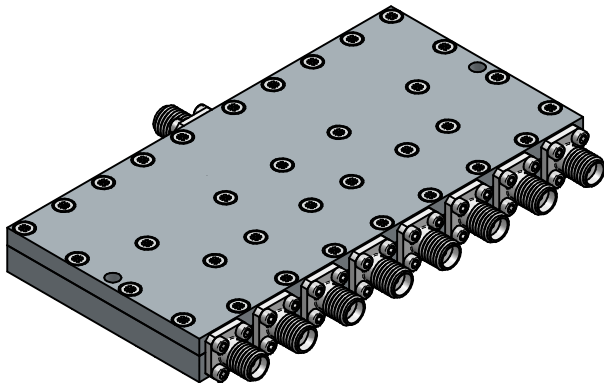

		Matière : Aluminium	Titre : 8 Way Power Divider	
		Traitement : Painted over surtec 650	6000 - 18000 MHz - 30 W	
		Classif. : 2	Tolérance générale : ± 0.5mm	Document N° : DI-8-6000-18000-30-SF-SF-B
		Echelle : 2:1	Feuille : 1 / 1	Date : 16/09/2016
Date	Indice	Nature de la modification	Niv. Sup.	Dessiné par : smellaza
16/09/16	B	Refonte mise en plan et baisse insertion loss: 2 dB -> 1.5 dB		