


CUSTOM - FILTER 1250-1400 MHz


Technology : Comblin Machined Structure

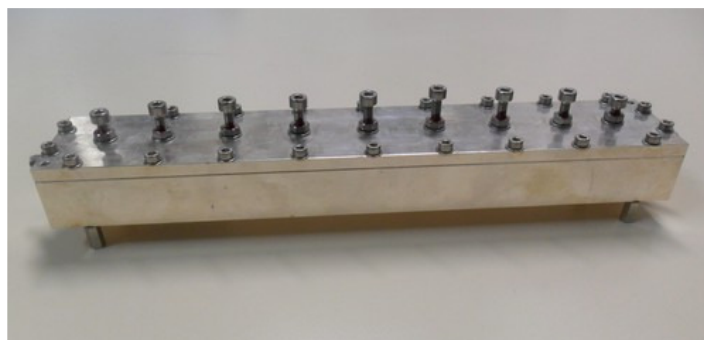

Specifications

Features	Values
Bandwidth:	1250-1400 MHz
VSWR :	1.5:1
Insertion loss :	< 0.5 dB
Rejection:	≥ 50 dB from 0 to 1050 MHz ≥ 25 dB from 1050 to 1160 MHz
Maximum power :	1 W
Operating temperature :	-25°C to +85°C
Connectors :	SMA Female
Dimensions (without connectors) (L x W x h)	240.5 x 43.5 x 25.4 mm

Response curves

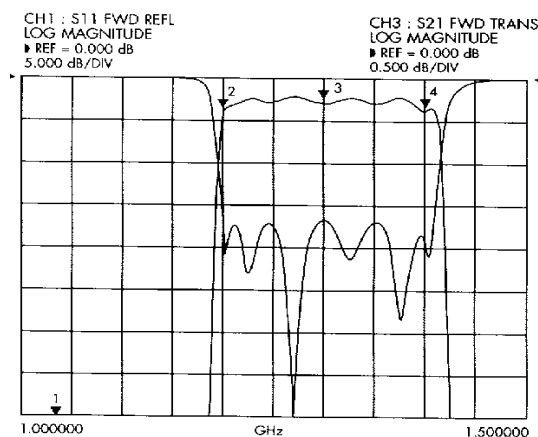

**This product illustrates one of our areas of expertise.
 Specific designs are available on request.**