
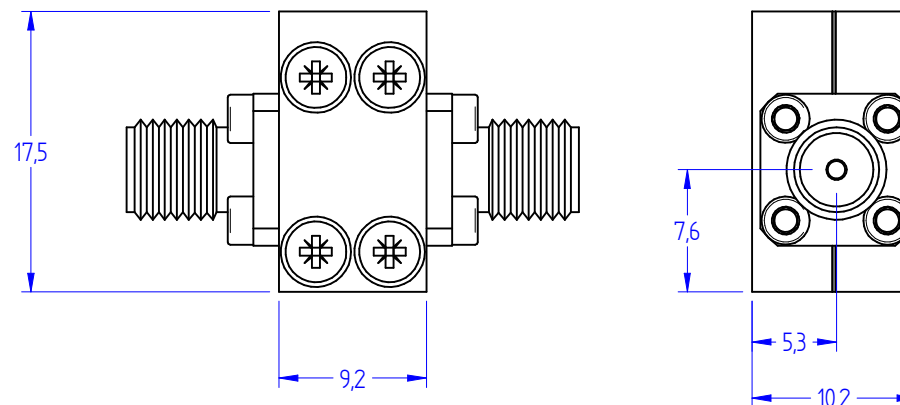
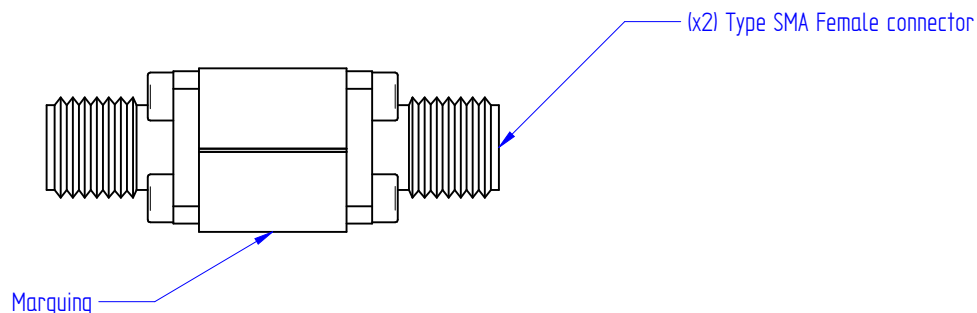


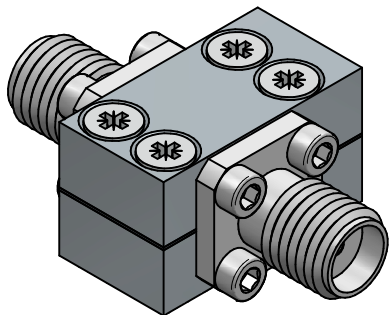

TECHNICAL SPECIFICATIONS

Frequency Range :	6000 - 18000 MHz
Insertion Loss :	0.7 dB max.
VSWR :	2.0 :1 max.
Rejection :	20 dB min. @ 4.0 Ghz 40 dB min. @ 3.0 Ghz
Power Handling :	2 W CW
Operating Temperature :	-40 °C to +85 °C
Storage Temperature	-55 °C to +125°C
Input Connector :	SMA Female
Output Connector :	SMA Female

Date	Version	Change	Next assy.	Material : Aluminum Finish: Silver plated	Classif. : 2	General Tolerance : ISO2768mK	Title : High Pass Filter FPH6G 6 - 18 GHz	Document Number : 800077 0A 1601A
				Scale : 3:1	Sheet : 1 / 1		Date : 01/02/2018	Drawn : smellaza