


16-WAY COMBINER – S BAND

Strip line technology

Features

This combiner tolerates full input failure on one or several ports (details on request)

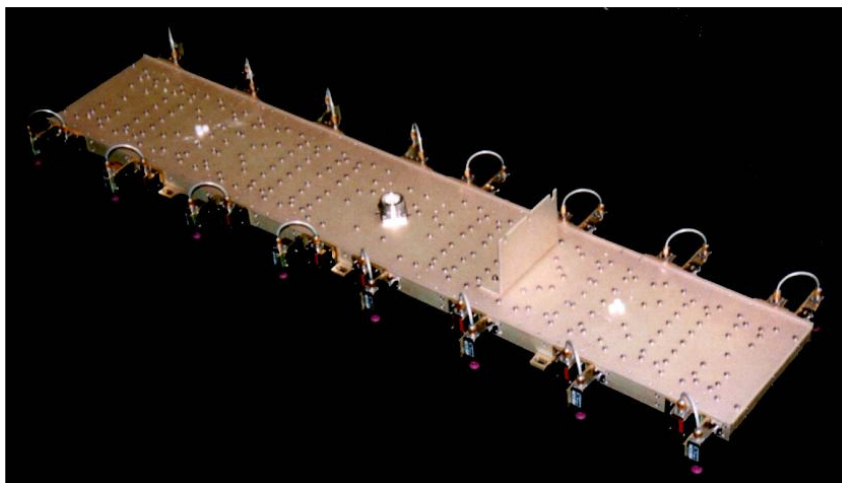

Specifications

Specifications	Values
Frequency :	2025 – 2120 GHz
Max Input power	40 W CW
Insertion loss	0.5 dB max.
VSWR	1.25:1 max.
Isolation	25 dB min.
Amplitude balance	0.5 dB max.
Phase balance	10° max.
Connector (I/O)	Female SMA – Female 7/16
Dimensions mm (L x W x H) :	963 x 276 x 74 (connectors included)
Operating temperature :	0°C +50°C

**This product illustrates one of our proprietary skills.
 Contact us for any other application.**