


TECHNICAL SPECIFICATIONS

Frequency Range :	100 kHz - 250 MHz
Insertion Loss :	0.4 dB max. @ 100 MHz 0.7 dB max. @ 250 MHz
Amplitude Balance :	0.1 dB max.
Phase Balance :	5° max.
Input VSWR :	1.2:1 max.
Output VSWR :	1.2:1 max.
Isolation :	15 dB min.
Max. Input Power :	300 W average @ VSWR Load unlimited
Input Failure :	No signal on 1 Way tolerant
Operating Temperature :	0°C to +40°C
Input Connectors :	N Female
Output Connector :	N Female

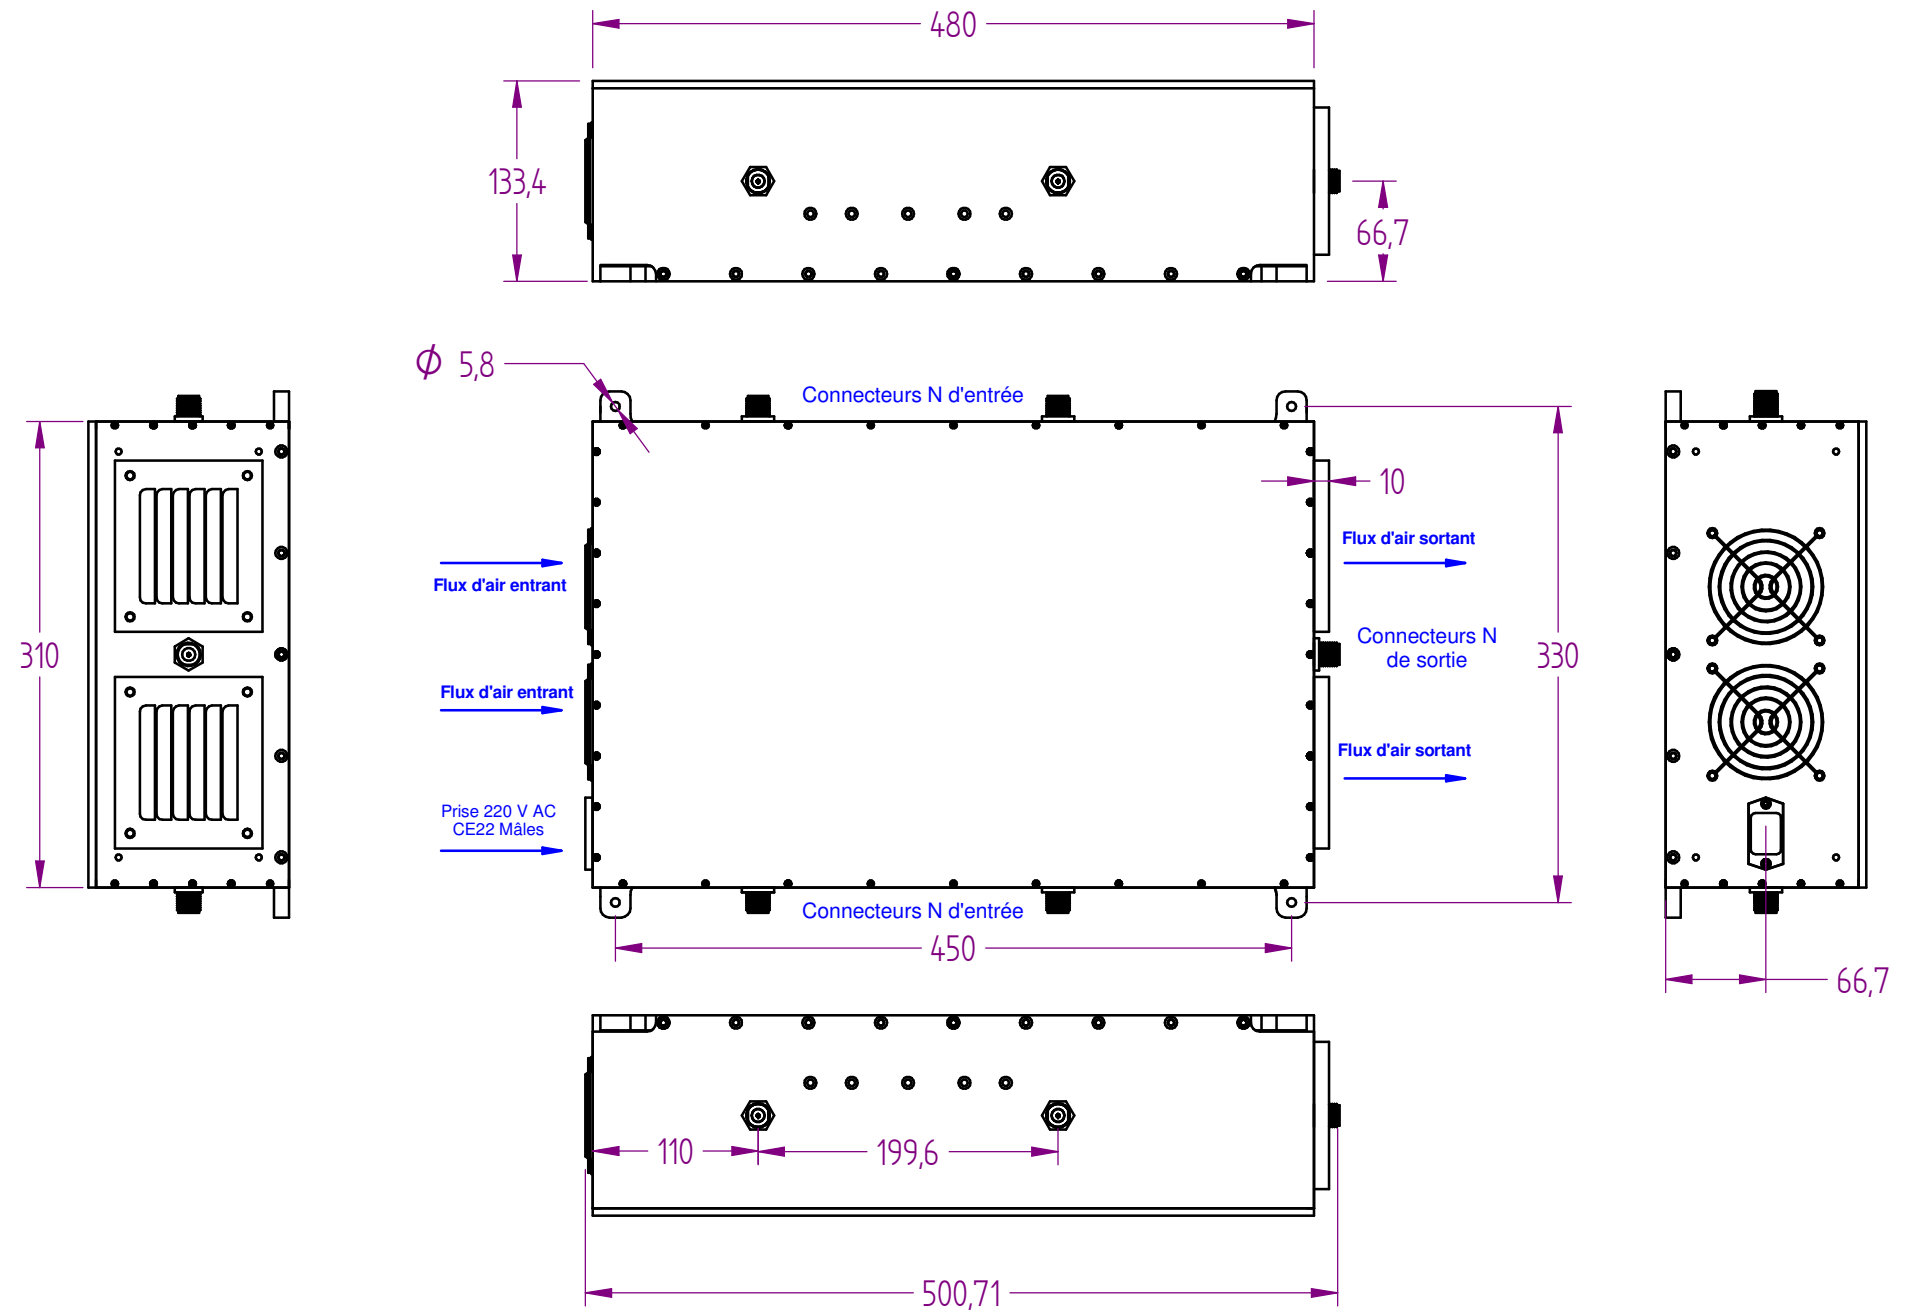

		Matière : Aluminium		Titre : 4-Way Power Combiner	
		Taitement : Surtec		100 kHz to 250 MHz - 1200 W	
		Classif. : 2	Tolérance générale : ± 0.1 mm	Document N° : 001 488 0A 15 01 PD A	
		Echelle : Selon tirage	Feuille : 1 / 1	Date : 12/06/2015	Dessiné par : emichaut
Date	Indice	Nature de la modification		7, rue de Kérélie - 29200 BREST - TEL : 02.98.47.90.57 - FAX : 02.98.03.75.04 - E-mail : contact@deli-sa.com - Web : www.deli-sa.com	