
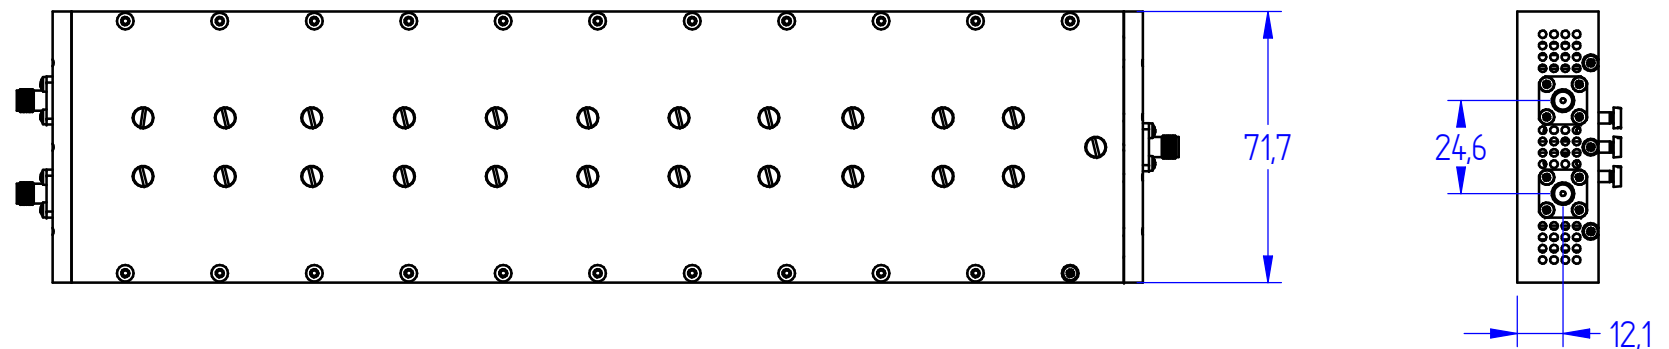
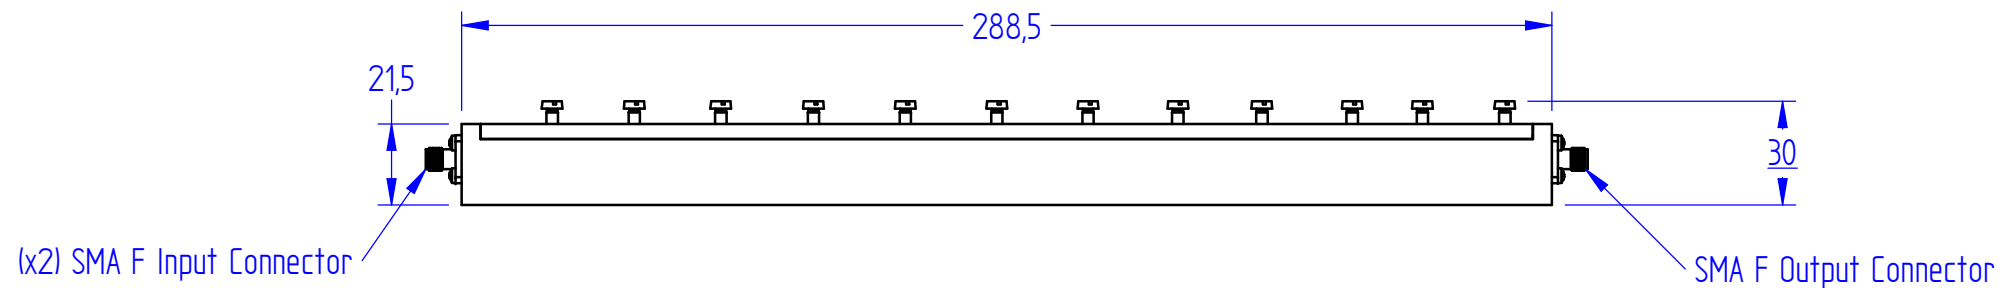


This document is subject to change without notice
This document is the exclusive property of DETI SAS and cannot be communicated to third parties or reproduced without prior written permission

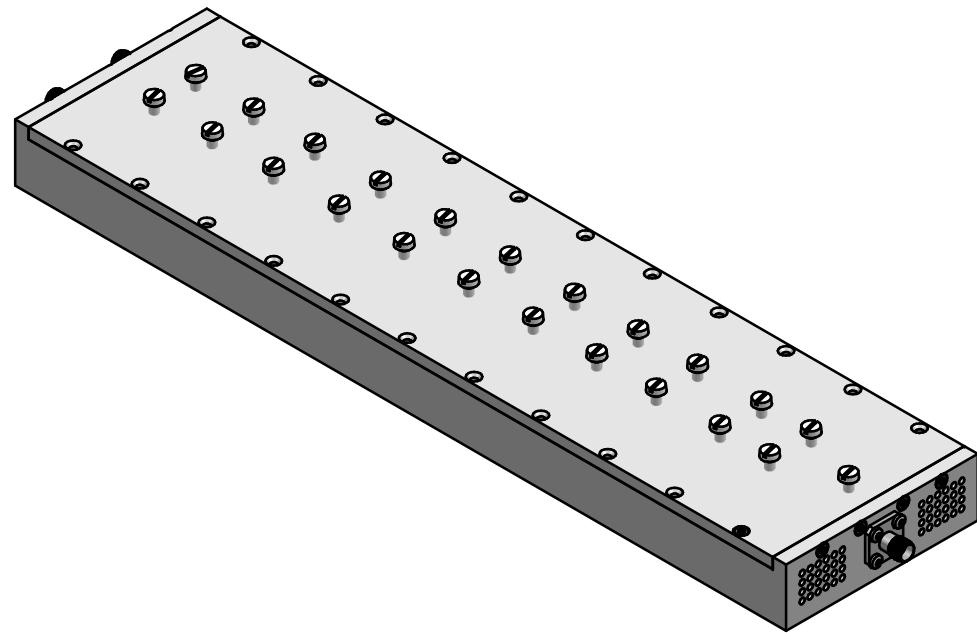

TECHNICAL SPECIFICATIONS

Frequency Range :	800 - 4200 MHz
Insertion Loss :	0.4 dB max.
VSWR Output :	1.5:1 max.
VSWR Input :	1.5:1 max. 800 to 4000 MHz 2.0:1 max. 4000 to 4200 MHz
Amplitude Balance :	+/- 0.2 dB
Phase Balance :	+/- 5°
Isolation :	12 dB min.
Power Handling :	150 W CW
Input Failure :	1 way off
Operating Temperature :	0 °C to +40 °C

Last rev. additional information :								Material : Aluminium		Titre : Combineur Large Bande Multi Octave 800-4200 MHz 150W Title : 2-Way Multi Octave Broadband Combiner 800-4200 MHz 150 W Comment : CO-2-800-4200-75-SF-SF	
								Treatment : Surtec 650			
								Finish : -			
								Gen. Tol. : ISO 2768 - mK			
								Orientation : - 			
-	Création du document		A. Le Gouvellec	18/06/2021	W.Kherraz	18/06/2021	S. Mellaza	18/06/2021	Size : A3	Classif. : 2	Document Number : 001517 0A 1501 A
Rev.	Change		Drawn	Date	Check	Date	Approb.	Date	Scale : 1:2	Sheet : 1 / 1	Drawn : alegouellec Date : 18/06/2021