
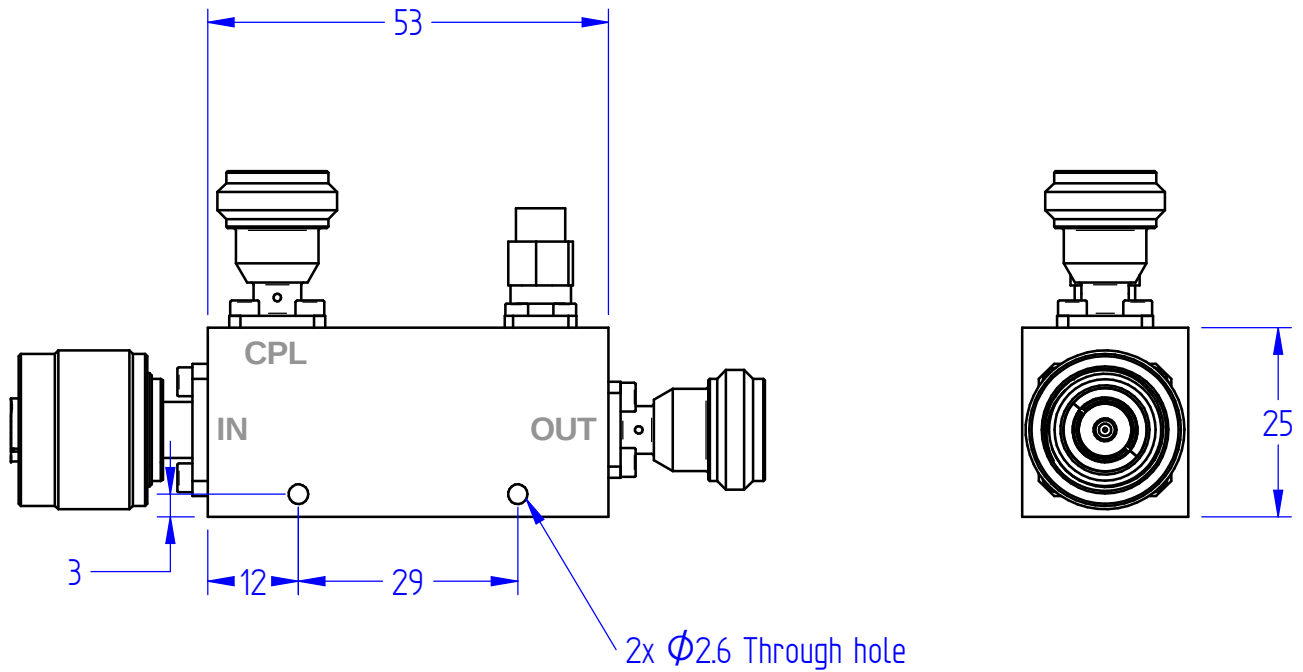


This document is subject to change without notice
This document is the exclusive property of DETI SAS and cannot be communicated to third parties or reproduced without prior written permission

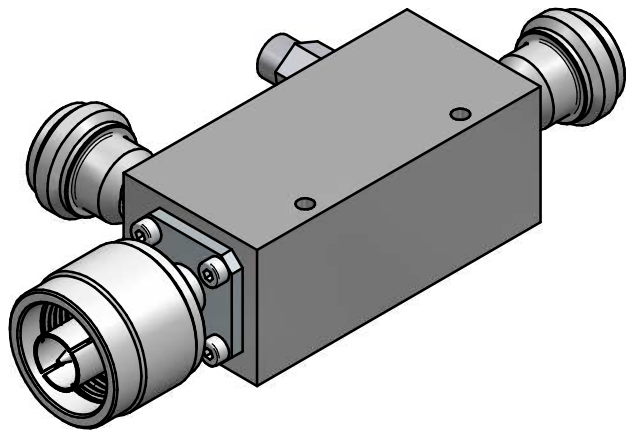

TECHNICAL SPECIFICATIONS

Frequency Range :	2200 - 2300 MHz
Coupling :	30 ± 1 dB
Frequency Sensivity :	± 0.5 dB
Maximum Insertion Loss :	0.2 dB
Minimum Directivity :	18 dB
Maximum VSWR :	1.25 : 1
Power Handling :	50W CW
Operating Temperature :	-40 °C to +85 °C
Input Connector :	N Male
Output Connector :	N Female
Coupling Connector :	N Female
Weight :	130 g

Last rev. additional information :								Material : Aluminium 6082		Titre : Coupleur Directif 2.2-2.3 GHz Title : Directionnal Coupler 2.2-2.3 GHz	
								Treatment : Surtec 650			
								Finish : Black Paint			
								Gen. Tol. : ISO 2768 - mK			
								Orientation : 			
-	Preliminary	W.Kherraz	26/11/19	A. Le Gouvello	27/11/19	Mellaza S.	27/11/19	Size : A3	Classif. : 2	Document Number CD-1-2200-2300-30-50-NM-NF-NF	
Rev.	Change	Drawn	Date	Check	Date	Approb.	Date	Scale : 1:1	Sheet : 1 / 1	Drawn : wkherraz	Date : 26/11/2019