
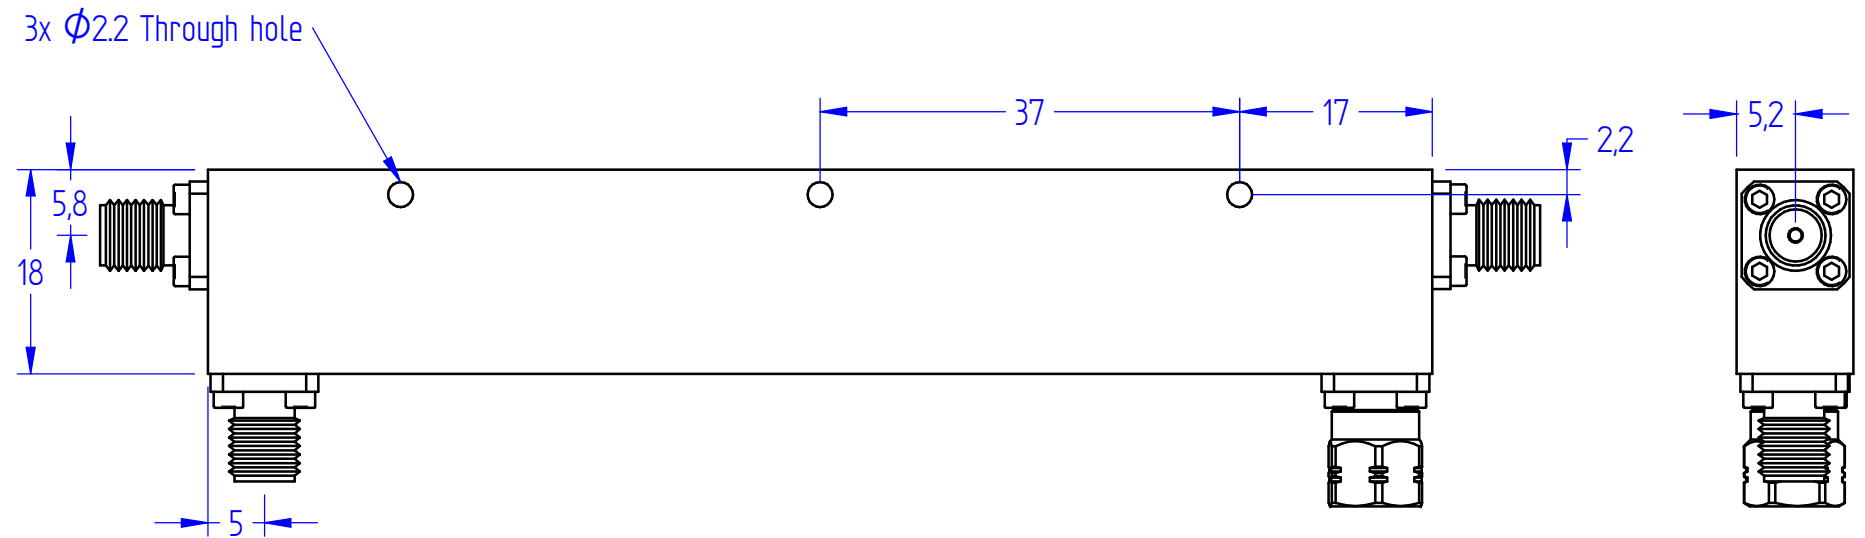
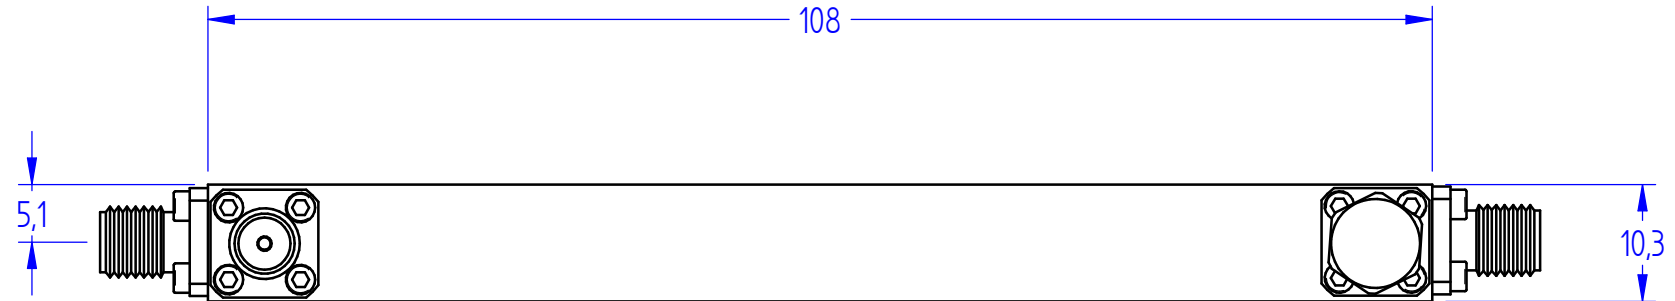


This document is subject to change without notice
This document is the exclusive property of DETI SAS and cannot be communicated to third parties or reproduced without prior written permission

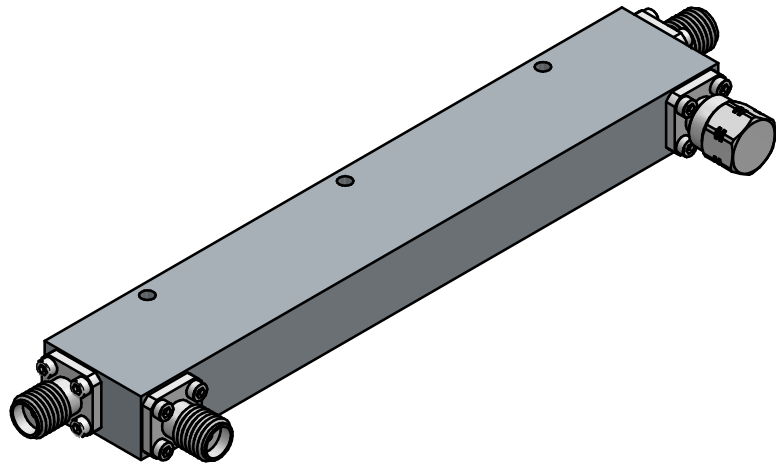

TECHNICAL SPECIFICATIONS

Frequency Range :	0.5 - 2 GHz
Coupling :	10 ± 1dB
Frequency Sensivity :	± 0.75 dB
Directivity :	22 dB min.
Insertion Loss :	0.3 dB max.
VSWR :	1.20 :1 max.
Power Handling :	50W average @ 1.20:1 VSWR load 3kW peak
Connector :	Main line SMA Female Coupling line SMA Female
Operating Temperature :	-40 °C to +85 °C

Last rev. additional information :Directivité : 20 dB -> 22 dB								Material : Aluminium		Titre : Coupleur Directionnel 0.5-2 GHz Directional Coupler 0.5-2 GHz	
								Treatment : Surtec 650			
								Finish : Black paint			
								Gen. Tol. : ISO 2768 - mK			
A	Modification valeur directivité		A. Le Gouvello	08/06/21	W.Kherraz	08/06/21	S. Mellaza	08/06/2021	Orientation : -  -		Comment :
-	Création		W.Kherraz	16/01/20	S. Mellaza	16/01/20	S. Mellaza	16/01/20	Size : A3	Classif. : 2	
Rev.	Change		Drawn	Date	Check	Date	Approb.	Date	Scale : 1.5:1	Sheet : 1 / 1	Document Number : CD-1-500-2000-10-50-SF-SF-SF
Drawn : wkherraz			Date : 16/01/2020								