


SPECIFICATIONS

Frequency Range :	2.0- 4.0 GHz
Coupling :	30 ± 1.25 dB
Frequency Sensitivity :	± 0.75 dB
Directivity :	20 dB min.
Insertion Loss :	0.2dB max.
VSWR :	1.20 : 1 max.
Power Handling :	50W average @ 1.20:1 load VSWR 5kW peak
Connectors :	Main line SMA Female Coupling line SMA female
Operating Temperature :	-40 to 85°C

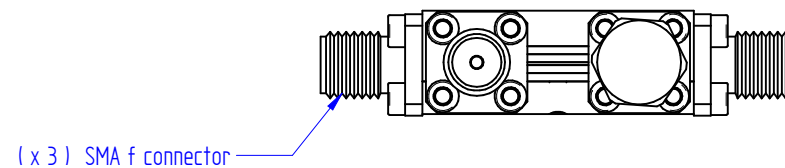

		Matière : Aluminium		Titre : DIRECTIONAL COUPLER 2-4 GHz 30 dB	
		Traitement : Black painted		CD-1-2000-4000-30-50-SF-SF-SF	
		Classif. : 2	Tolérance générale : ± 0.5mm	Document N° : 800057 0A 1601A	
		Echelle : 2:1	Feuille : 1 / 1	Date : 01/09/2017	Dessiné par : smellaza
Date	Indice	Nature de la modification		7, rue de Kérébel - 29200 BREST - TEL : 02.98.47.90.57 - FAX : 02.98.03.75.04 - E-mail : contact@deti-sa.com - Web : www.deti-sa.com	